


2.5Gbps SFP Module MM LC 550m data range (850nm)



## GBIC-, SFP-, XFP-, XENPAK-Transceiver

The tde Small Form Pluggable Optical Transceiver are easy installed for enterprise and telecom applications. The tde SFP modular line provides a fully compatible, highly reliable and volume accessible supply of quality transceiver products with excellent performance for design-in manufacturing and end-user enterprise applications.

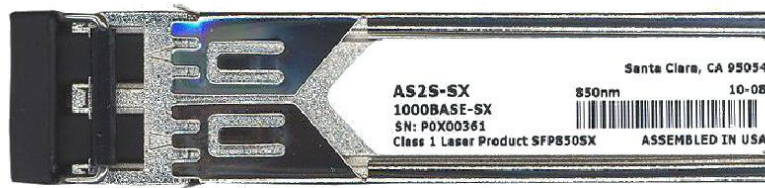

**tde<sup>®</sup>** trans data elektronik GmbH

**Headquarter address:**

Lingener Str. 2  
D-49626 Bippen/Ohrte  
Tel.: +49 5435 9511 0  
Fax.: +49 5435 9511 32

**Sales office address:**

Prinz-Friedrich-Karl-Str. 46  
D-44135 Dortmund  
Tel.: +49 231 914 36 99  
Fax.: +49 231 914 31 29

info@tde.de | www.tde.de

## 2.5Gbps SFP Module MM LC 550m data range (850nm)

### Technical Data

#### Features

- Operating data rate up to 2.5Gbps
- 850nm VCSEL Laser Transmitter
- 300m with 50/125  $\mu$ m MMF, 150m on 62.5/125  $\mu$ m MMF
- Single 3.3V Power supply and TTL Logic Interface
- Duplex LC Connector Interface
- Hot Pluggable
- Operating Case Temperature Industrial: -40°C~+85°C
- Compliant with MSA SFP Specification
- Digital diagnostic monitor interface Compatible with SFF-8472

#### Applications

- Gigabit Ethernet Switches and Routers
- Fiber Channel Switch Infrastructure
- XDSL Applications
- Metro Edge Switching

#### Regulatory Compliance

Features	Standard	Performance
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7	Class 1(>500 V) Isolation with the case
Electromagnetic Interference (EMI)	FCC Part 15 Class B	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2	Compatible with Class I laser product. Compatible with T $\dot{U}$ V standards
Component Recognition	UL and CUL	UL file E317337
Green Products	RoHS	RoHS6

#### Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	TS	-40	+85	°C
Supply Voltage	VCC	-0.5	3.6	V

#### Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit
Operating Case Temperature	TA / A2S2-SX	-40		+85	°C
Power Supply Voltage	VCC	3.15	3.3	3.45	V
Total Supply Current	ICC			300	mA
Surge Current	ISurge			+30	mA

## 2.5Gbps SFP Module MM LC 550m data range (850nm)

Baud Rate 1.063 2.5 GBaud

### Performance Specifications - Electrical

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
<b>Transmitter</b>						
LVPECL Inputs (Differential)	Vin	400		2500	mVp	AC coupled inputs
Input Impedance (Differential)	Zin	85	100	115	ohms	Rin > 100 kohms @ DC
Tx_DISABLE Input Voltage - High		2		3.45	V	
Tx_DISABLE Input Voltage - Low		0		0.8	V	
Tx_FAULT Output Voltage - High		2		Vcc+0.3	V	Io = 400µA; Host Vcc
Tx_FAULT Output Voltage - Low		0		0.5	V	Io = -4.0mA
<b>Receiver</b>						
LVPECL Outputs (Differential)	Vout	400	800	1200	mVpp	AC coupled outputs
Output Impedance (Differential)	Zout	85	100	115	ohms	
Rx_LOS Output Voltage - High		2		Vcc+0.3	V	Io = 400µA; Host Vcc
Rx_LOS Output Voltage - Low		0		0.8	V	Io = -4.0mA
MOD_DEF ( 0:2 )	VoH VoL	2.5 0		0.5	V V	With Serial ID

### Optical and Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit
50µm Core Diameter MMF					
-1.063G	L	500		m	
-2.125G	L	300		m	
62.5µm Core Diameter MMF					
-1.063G	L		300		m
-2.125G	L		150		m
Data Rate			2.5		Gbps
<b>Transmitter</b>					
Centre Wavelength	λc	820	850	860	nm
Spectral Width (RMS)	σ			0.85	nm
Average Output Power	P Out	-10		-4	dBm
Extinction Ratio	EX	9			dB
Rise/Fall Time (20% – 80%)	tr/tf			160	ns
Output Optical Eye	ITU-T G.957 Compliant				

## 2.5Gbps SFP Module MM LC 550m data range (850nm)

Data Input Swing Differential	V IN	500		2000	mV
Input Differential Impedance	ZIN	90	100	110	Ω
TX Disable - Disable		2.0		VCC+0.3	V
- Enable		0		0.8	V
TX_Fault - Fault		2.0		VCC+0.3	V
- Normal		0		0.8	V
TX_Disable Assert Time t_off				10	us
<b>Receiver</b>					
Centre Wavelength	λc	760		860	nm
Sensitivity	PIN			-15	dBm
Output Differential Impedance	P IN	90	100	110	Ω
Data Output Swing Differential	VOUT	370		2000	mV
Rise/Fall Time	Tr/TF			2.2	ns
LOS De-Assert	LOSD			-16	dBm
LOS Assert	LOSA	-30			dBm
LOS -High		2,0		VCC+0.3	V
-Low		0		0.8	V

## Product variants & accessories

Art.-No.	Description
TDE-AS2S-SX	2.5Gbps SFP Module MM LC 550m data range (850nm)