


tML[®] HD - FO Patch cord switchable LC HD / LC HD Duplex Mini 9/125 μ , FRNC, OS2, Crossover,
Length: xxx in m



tML[®] - tde Modular Link

tML[®] is a patented, modular cabling system consisting of the three key components module, trunk cable and rack mount enclosure. The system components are 100 percent manufactured, pre-assembled and tested in Germany. They enable plug-and-play installation on site - especially in data centres, but also in industrial environments - within the shortest possible time. The system is characterized by highest packing density and highest flexibility during migration to higher transmission rates. Fibre optic and TP modules can be combined in one rack mount enclosure. 96x fibre optics LC Duplex or 96x MPO connectors can be used modularly on a 19-inch height unit. Thanks to its patented polarity and dark fibre modules, the tML system offers the simplest migration options to 100G and more.

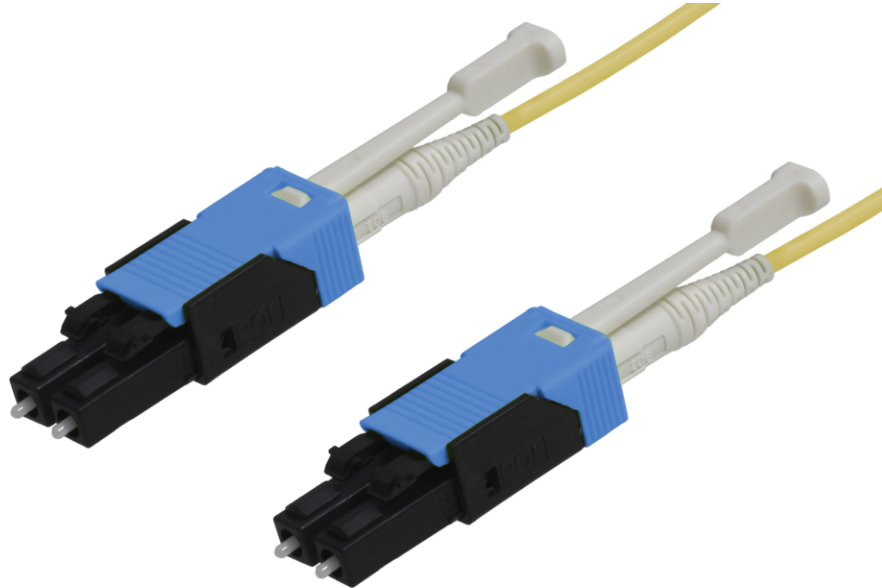

tde[®] trans data elektronik GmbH

Headquarter address:

Lingener Str. 2
D-49626 Bippen/Ohrte
Tel.: +49 5435 9511 0
Fax.: +49 5435 9511 32

Sales office address:

Prinz-Friedrich-Karl-Str. 46
D-44135 Dortmund
Tel.: +49 231 914 36 99
Fax.: +49 231 914 31 29

info@tde.de | www.tde.de

tML[®] HD - FO Patch cord switchable LC HD / LC HD Duplex Mini 9/125 μ , FRNC, OS2, Crossover,
Length: xxx in m

Technical Data

FO Connectors

Connector type	LC HD Duplex Uniboot
Housing	Plastic, integrated locking of unlocking aid
Polarity	Tool-less
Ferrule	Zirkonia Straight Split, Spring-loaded Axially
Ferrule hole	125 μ m
Mating cycles	1000
Operating temperature	-40°C to 75°C
Strain relief to	100 N
Manufacturer	tde
Simplex/Duplex clip	Uniboot Duplex Housing

Optical performance

Fiber	Type	Wavelength	Insertion loss typ.	Insertion loss max.	Return loss min.
9/125 μ	LC Uniboot HD UPC	1550 nm	< 0.10 dB	0.25 dB	55 dB

FO Cables

Flame resistance	IEC 60332-3
	IEC 60754
	IEC 61034-1
	IEC 61034-2

Cable construction

Type	DVH02E09-2.0
Tight buffer	2x 600 μ coated fibers (free movable in the compound)
Fiber type	SM-G652D, 9/125 μ , Corning SMF-28e+, OS2
Strength members	Aramid yarn (free movable in the compound)
Outer jacket	LSZH (Halogen free, low smoke, flame retardant thermoplastic compound)
Jacket color	Yellow, RAL 1021
Identification	"t d e – DVH02E09-2.0mm LSZH" and sequential meter marking + Lot number

Physical properties

Outer diameter cable	2.0 \pm 0.1 mm
Maximum tensile load, short term	500 N
Maximum tensile load, long term	300 N
Min. Bending radius, unloaded	20 mm

tML[®] HD - FO Patch cord switchable LC HD / LC HD Duplex Mini 9/125 μ , FRNC, OS2, Crossover,
Length: xxx in m

Min. Bending radius, loaded	40 mm
Temperature range (operation)	-5°C to +60°C

FO Fiber

Type	Corning SMF-28e+ [®] 09/125 μ OS2 G.652.D singlemode fiber
Maximum Attenuation	At 1310 nm max. 0.33 - 0.35 dB/km At 1383 \pm 3 nm max. 0.31 - 0.35 dB/km At 1490 nm max. 0.21 - 0.24 dB/km At 1550 nm max. 0.19 - 0.20 dB/km At 1625 nm max. 0.20 - 0.23 dB/km
Attenuation vs. Wavelength	Range: 1285 - 1330 nm; Ref. λ : 1310 nm; Max. Difference: 0.03 dB/km Range: 1525 - 1575 nm; Ref. λ : 1550 nm; Max. Difference: 0.02 dB/km
Macrobend Loss	Mandrel Diameter:32mm; Number of Turns: 1; Wavelength: 1550nm; Induced Attenuation: \leq 0.03 dB Mandrel Diameter:50mm; Number of Turns: 100; Wavelength: 1310nm; Induced Attenuation: \leq 0.03 dB Mandrel Diameter:50mm; Number of Turns: 100; Wavelength: 1550nm; Induced Attenuation: \leq 0.03 dB Mandrel Diameter:60mm; Number of Turns: 100; Wavelength: 1625nm; Induced Attenuation: \leq 0.03 dB
Point Discontinuity	Wavelength: 1310 nm; Point Discontinuity: \leq 0.05 dB Wavelength: 1550 nm; Point Discontinuity: \leq 0.05 dB
Cable Cutoff Wavelength (λ_{ccf})	$\lambda_{ccf} \leq 1260$ nm
Mode-Field Diameter	At 1310 nm = 9.2 ± 0.4 μ m At 1550 nm = 10.4 ± 0.5 μ m
Dispersion	At 1550 nm = ≤ 18.0 [ps/(nm*km)] At 1625 nm = ≤ 22.0 [ps/(nm*km)] Zero Dispersion Wavelength (λ_0): 1310 nm $\leq \lambda_0 \leq 1324$ nm Zero Dispersion Slope (S_0): ≤ 0.092 ps/(nm ² *km)
Polarization Mode Dispersion (PMD)	PMD Link Design Value = ≤ 0.06 ps/ \sqrt km Maximum Individual Fiber = ≤ 0.1 ps/ \sqrt km
Norm	ITU-T Recommendation G.652 (Tables A, B, C, and D) IEC Specifications 60793-2-50 Type B1.3 TIA/EIA 492-CAAB Telcordia Generic Requirements GR-20-CORE ISO 11801 OS2

Dimensional Specifications

Fiber Curl	≥ 4.0 m radius of curvature
Cladding Diameter	125.0 ± 0.7 μ m
Core-Clad Concentricity	≤ 0.5 μ m
Cladding Non-Circularity	$\leq 0.7\%$
Coating Diameter	242 ± 5 μ m
Coating-Cladding Concentricity	< 12 μ m

Environmental Specifications

Environmental Test	Test Condition	Induced Attenuation 1310 nm, 1550 nm & 1625 nm
--------------------	----------------	--

tML[®] HD - FO Patch cord switchable LC HD / LC HD Duplex Mini 9/125 μ , FRNC, OS2, Crossover,
Length: xxx in m

Temperature Dependence	-60°C to +85°C	≤ 0.05
Temperature Humidity Cycling	-10°C to +85°C up to 98% RH	≤ 0.05
Water Immersion	23°C ± 2°C	≤ 0.05
Heat Aging	85°C ± 2°C	≤ 0.05
Operating Temperature Range	-60°C to +85°C	

Mechanical Specifications

Proof Test	The entire fiber length is subjected to a tensile stress ≥ 100 kpsi (0.7 GPa).
Length	Fiber lengths available up to 63.0 km/spool.

Performance Characterizations

Core Diameter	8.2 μ m
Numerical Aperture	0.14
Zero Dispersion Wavelength (λ_0)	1317 nm
Zero Dispersion Slope (S_0)	0.088 ps/(nm ² *km)
Effective Group Index of Refraction	1310 nm: 1.4676 1550 nm: 1.4682
Fatigue Resistance Parameter (nd)	20
Coating Strip Force	Dry: 0.6 lbs (3N) Wet: 14 days room temperature: 0.6 lbs (3N)
Rayleigh Backscatter Coefficient (for 1 ns Pulse Width)	1310 nm: -77 dB 1550 nm: -82 dB

Product variants & accessories

Art.-No.	Description
TMLHLCA/HLCA09DRMxxx	tML [®] HD - FO Patch cord switchable LC APC HD / LC APC HD Duplex Mini 9/125 μ , FRNC, OS2, Crossover, Length: xxx in m
TML-HLC/HLC09DRMxxx	tML [®] HD - FO Patch cord switchable LC HD / LC HD Duplex Mini 9/125 μ , FRNC, OS2, Crossover, Length: xxx in m
TML-HLC/HLC50D4RMxxx	tML [®] HD - FO Patch cord switchable LC HD / LC HD Duplex Mini 50/125 μ , FRNC, OM4, Crossover, Length: xxx in m
TML-HLC/HLC50D5RMxxx	tML [®] HD - FO Patch cord switchable LC HD / LC HD Duplex Mini 50/125 μ , FRNC, OM5, Crossover, Length: xxx in m